




Shop Online!

CR1

1200 x 800 mm

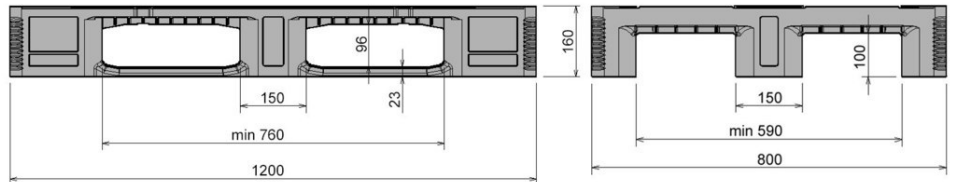

Art.-Nr.: 83230801



Technical data

Dimensions L x W x H (mm)	1200 x 800 x 160		
Weight (kg)	19.0 kg		
Material*2	PE		
Load capacity (kg)*3	Static 7500 kg	Dynamic 1750 kg	In Racking System 1750 kg

Characteristics

Colour: dark grey / blue
 Runners: 3, unwelded
 Reinforcement profiles: 3
 Antislip: yes, 3 Palgrip® anti-slip strips on the top deck
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

Options

Transponder (RFID)
 Rimoptions

Loading quantities (Pcs / Approximate amount)

Container	Container 20': 192	Container 40' High Cube: 440
	Container 40': 390	Conventional trailer 45' high cube container: 495
Truck	MEGA-Trailer: 612	Jumbo: 684

Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
 *2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
 *3 **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.
Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.
In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.