

# BAC 160

01001201-xxx OLI-1



*\*Photo for illustrative purposes*

## Insulated container standard specifications

### Box & lid :

- **Monobloc wall** in UV-resistant food grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc silicone frame seal** ;
- **Sealing frontal toggle closure**, yellow zinc coating ;
- **Lid opening at 115°** ;
- **4 side-handling handles** rotationally molded into the mass ;
- **Mass-produced boss** for stacking ;
- Maximum capacity of storable pellets :  $\approx$  120 kg

## Accessory options

- Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see user guide) ;
- Feet** : set of 4 metal feet.


## Customization

- Signage** : heat-sealed adhesive – ready-to-print file provided by the client.
- Tracking** : temperature/GPS tracking solution.
- Branding marking** : engraved aluminum plate 150 x 90 mm

## Cold source

### ADVICES

**Eutectic plates** : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

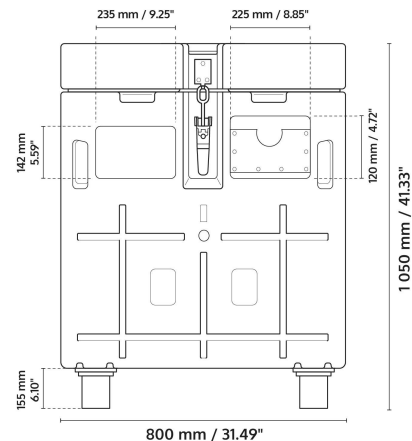

## Insulated container properties

Thermal	Value
Coef K	0.32 W/m <sup>2</sup> .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	$\approx$ 100 mm
Internal convection grooves	

Mechanical	Value
Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved



■ Update 26 /10/2023

    
Chilled Frozen Ambient

  
cold logistics

1 bld des Mineurs 42230 Roche-la-Molière / [www.olivo.eu](http://www.olivo.eu)