

BAC 55

01001070-xxx OLI-1



**Photo for illustrative purposes*

Insulated container standard specifications

Box & Lid :

- **Monobloc wall** in UV-resistant food grade polyethylene ;
- Injected polyurethane foam ;
- **Monobloc silicone frame seal** ;
- **Sealing frontal toggle closure**, yellow zinc coating ;
- **Lid opening at 115°** ;
- 2 **side-handling handles** rotationally molded into the mass ;
- **Mass-produced boss** for stacking ;
- Maximum capacity of storable pellets : \approx 40 kg.

Accessory options

Removable galvanized steel caster base, rolling configuration according to the existing Olivo standard, sandwich polyamide wheel diameter 100 mm.

Customization


- Signage** : heat-sealed adhesive – ready-to-print file provided by the client.
- Tracking** : temperature/GPS tracking solution.
- Logo molded into the mass.**
- Branding marking** : engraved aluminum plate 150 x 90 mm

Cold source

ADVICES

Eutectic plate : up to 2 eutectic plates TOP55 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 6L, made of aluminum.

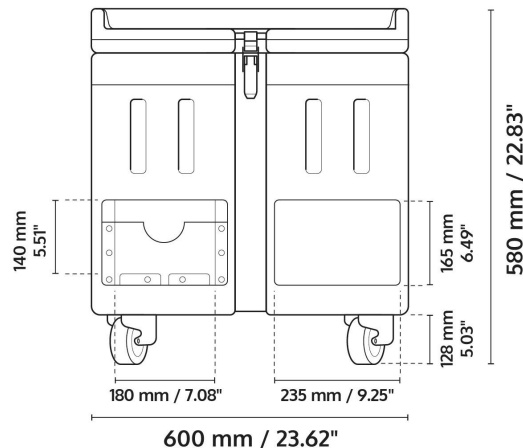

Insulated container properties

Thermal	Coef K.	0.39 W/m2.°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	\approx 90 mm
Mechanical	Internal convection grooves	
	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg
Double-walled, rotational-molded and grooved		



External dimensions (L x l x h)

600 x 500 x 580 mm

Internal dimensions (L x l x h)

415 x 315 x 410 mm

Internal volume

53 L

Empty weight

17 Kg

Logistical specifications

Quarter ISO pallet 1000 x 1200 mm



Chilled



Frozen



Ambient