


TWISTLOCK BOX

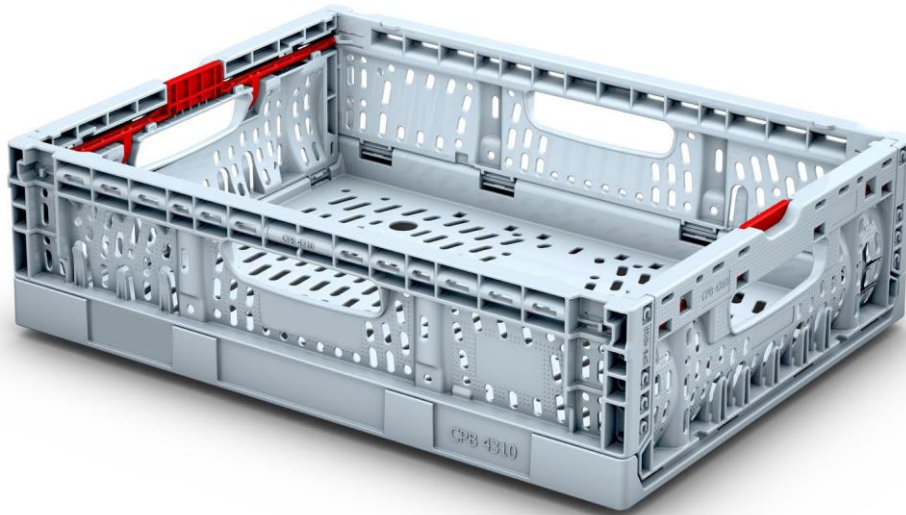

QUALITIES

EASY TO HANDLE

- W Brand new Twistlock locking system
- W Handles on all sides
- W Mixed stacking 4300 & 6400 boxes

STABLE

- W Reduces transport breakage
- W For rapid order picking
- W Up to 500 kg static / 300 kg dynamic pressure resistance in the stack

HYGIENIC

- W Flat and smooth surfaces
- W Easy to clean, low amount of residual water
- W Easy removal of adhesive labels

PROTECTIVE

- W Smooth inner surfaces
- W Smooth bottom side
- W Optimal ventilation

ATTRACTIVE & ECO-FRIENDLY

- W Attractive design
- W Fewer empty transports = less CO₂
- W Recyclable multiple times

COST EFFECTIVE

- W Optimized inside volume
- W Perfect volume reduction
- W Can be automated

NOTES ON USE

UNFOLDING



Set up long sides vertically



Set up short sides vertically until they lock into place. Make sure all closures lock into place at the 4 corners.


STACKING



Stack with the bottom side facing down

FOLDING



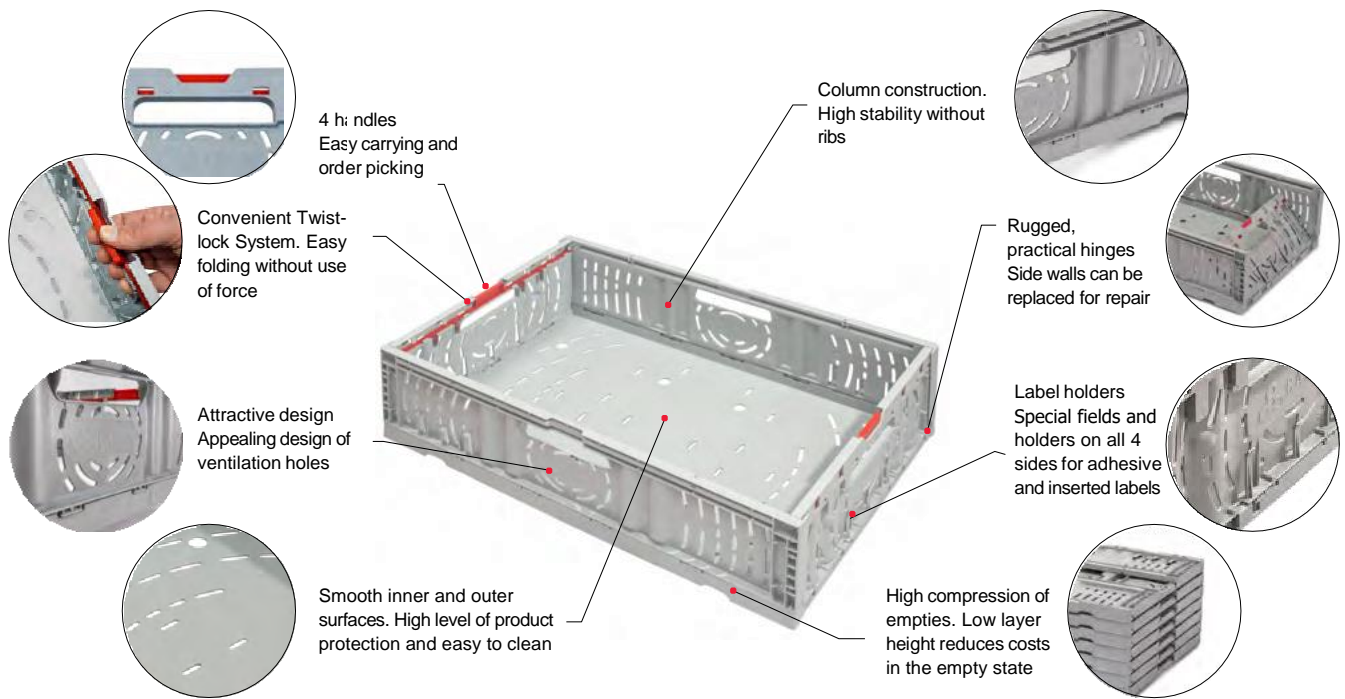

TECHNICAL DATA

TYPES	CPB 4310	CPB 4316	CPB 6410	CPB 6416	CPB 6416C	CPB 6422	CPB 6430
Basic Measurement [mm]	400 x 300	400 x 300	600 x 400	600 x 400	600 x 400	600 x 400	600 x 400
Usable Height [mm]	106	166	110	165	165	220	297
Version (wall design)	Open	Open	Open	Open	Closed	Open	Open
External Dimensions [mm]	400 x 300 x 114	400 x 300 x 166	600 x 400 x 118	600 x 400 x 173	600 x 400 x 173	600 x 400 x 229	600 x 400 x 306
Internal Dimensions [mm]	374 x 274 x 106	374 x 274 x 166	575 x 373 x 110	575 x 373 x 165	575 x 373 x 165	572 x 372 x 220	574 x 375 x 297
Filling Volume [l]	10,8	16,9	23,6	35,4	35,4	46,8	63,9
Tare [g]	723	878	1498	1802	1840	1832	2020
Load Bearing Capacity [kg]	5	7	10	15	15	20	20
Pressure Resistance in the Stack [kg]	200 static 100 dynamic	200 static 100 dynamic	400 static 200 dynamic	400 static 200 dynamic	400 static 200 dynamic	400 static 200 dynamic	400 static 200 dynamic
Layer Height of Full Box [mm]	108	168	113	168	168	223	303
Layer Height of Collapsed Box [mm]	28	28	28	28	28	33	33
Color of the Box	Black RAL 9005 Yellow RAL 1003 Red RAL 3001 Blue RAL 5022 Grey RAL 7001						
Color of Twistlock Lock	Red (exception red box: black locking)						

DELIVERY UNIT (EMPTIES)

TYPES	CPB 4310	CPB 4316	CPB 6410	CPB 6416	CPB 6416C	CPB 6422	CPB 6430
Boxes/europallet	624 pcs.	624 pcs.	312 pcs.	312 pcs.	312 pcs.	264 pcs.	264 pcs.
Boxes/truck*	20.592 pcs.	20.592 pcs.	10.296 pcs.	10.296 pcs.	10.296 pcs.	8.712 pcs.	8.712 pcs.
Europallets/truck*	33 pcs.	33 pcs.	33 pcs.	33 pcs.	33 pcs.	33 pcs.	33 pcs.
Total height incl. pallet	2350 mm	2350 mm	2350 mm	2350 mm	2350 mm	2350 mm	2350 mm

* size of truck: 13,20 x 2,46 x 2,50 m

Technical information: The Twistlock Box is suitable for temperatures ranging from 0° C to 50° C. The technical properties can be guaranteed under these conditions if handled appropriately. The raw materials used in the production of the Twistlock Box comply with the requirements of the FDA and the BGA. The suitability for specific products which are to be packaged has to be confirmed hereby, we are not liable for any damages arising from inappropriate handling of the Twistlock