




Palgrip

CR3-5 ECO

1200x1000mm

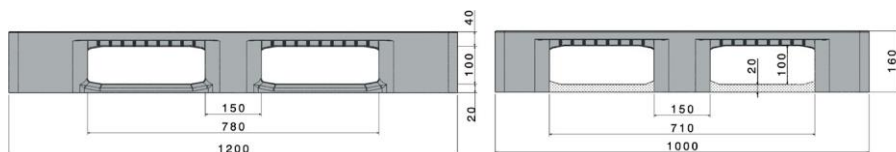

Art. no. 83332201

Technical data *1

Dimensions L x W x H (mm)	1200 x 1000 x 160
Weight (kg)	25.0
Material*2	HDPE, Regranulated material
Load capacity (kg)*3	<div> Static 7500 </div> <div> Dynamic 1500 </div> <div> In racking system 1400 </div>

Characteristics

Colour: black / light blue
 Runners: 5, unwelded
 Reinforcement profiles: 5
 Rims: 5 mm
 Antislip: Yes, 5Palgrip® anti-slip strips on the top deck
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C
 Manufactured from regnanulated material of one single type

Options


Transponder
 Reinforcement profiles
 Rim options

Loading quantities (pcs/approx.)

Container	Container 20': 141 Container 40': 300	Container 40' High Cube: 340 Conventional trailer 45' high cube container: 390
Truck	MEGA-Trailer: 468	Jumbo: 504-540

Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C. Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C. In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.