



Art. no. 83232230

Palgrip




LOGEQ

Logistic Equipment

CR1 ECO

1200x800mm

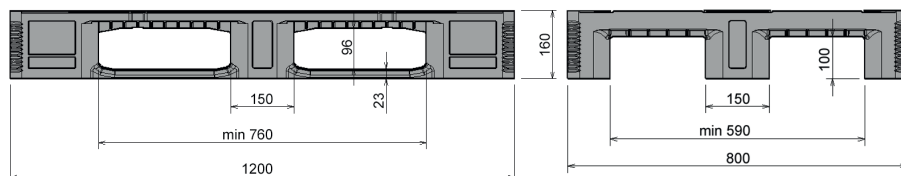

Technical data *1

Dimensions L x W x H (mm)	1200 x 800 x 160
Weight (kg)	19.0
Material*2	HDPE, Regranulated material

Load capacity (kg)*3



Static
7500



Dynamic
1750



In racking system
1750

Characteristics

Colour: black/ light blue
Runners: 3, unwelded
Reinforcement profiles: 3
Antislip: Yes, 3Palgrip® anti-slip strips on the top deck
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C
Manufactured from regnanulated material of one single type

Options

Transponder
Rim options

Loading quantities (pcs/approx.)



Container

Container 20': 192
Container 40': 390

Container 40' High Cube: 440
Conventional trailer 45' high cube container: 510




Truck

MEGA-Trailer: 612

Jumbo: 684

Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

*3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100h at a room temperature of approx. 20 °C.