



**Palgrip**

# CR3 ECO

1200 x 1000 mm

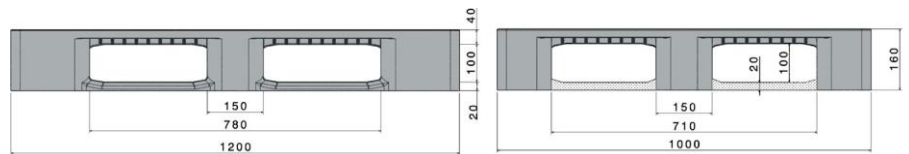

Art. no. 83335202

## Technical data \*1

Dimensions L x W x H (mm)	1200 x 1000 x 160		
Weight (kg)	20.0		
Material*2	HDPE, Regranulated material		
Load capacity (kg)*3	 Static 5000	 Dynamic 1250	 In racking system 1000

## Characteristics

Colour: black / light blue  
 Runners: 3, unwelded  
 Rims: 5 mm  
 Antislip: Yes, 5 Palgrip® anti-slip strips on the top deck  
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
 Manufactured from regnanulated material of one single type

## Options


Transponder  
 Reinforcement profiles  
 Rim options

## Loading quantities (pcs/approx.)

 Container	Container 20': 141	Container 40' High Cube: 340
	Container 40': 300	Conventional trailer 45' high cube container: 390
 Truck	MEGA-Trailer: 468	Jumbo: 504-540

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C. Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C. In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.