




# D1 ECO

1200x800mm

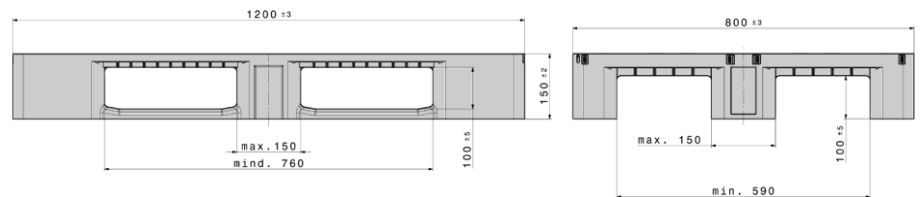

Art. no. 83360200

## Technical data \*1

Dimensions L x W x H (mm)	1200 x 800 x 150		
Weight (kg)	120		
Material*2	HDPE, Regranulated material		
Load capacity (kg)*3	 Static 5000	 Dynamic 1000	 In racking system 400



## Characteristics

Colour: black  
 Runners: 3, unwelded  
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
 Manufactured from reggranulated material of one single type

## Options



Transponder  
 Reinforcement profiles  
 Rim options  
 Antislip

## Loading quantities (pcs/approx.)

 Container	Container 20': 215	Container 40' High Cube: 490
	Container 40': 440	Conventional trailer 45' high cube container: 544
 Truck	MEGA-Trailer: 646	Jumbo: 684-722

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100h at a room temperature of approx. 20 °C.