
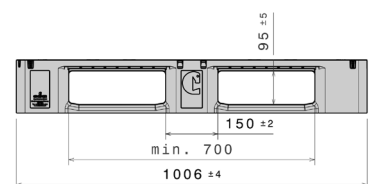


# D3-5 ECO

1200 x 1000 mm

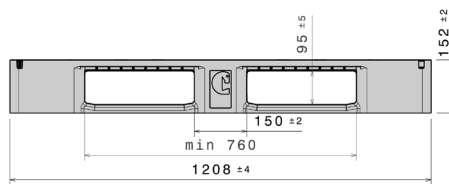

Art. no. 83320200

## Technical data <sup>\*1</sup>

Dimensions L x W x H (mm)	1200 x 1000 x 150
Weight (kg)	15.0
Material <sup>*2</sup>	HDPE, Regranulated material
Load capacity (kg) <sup>*3</sup>	



**Static**  
5000



**Dynamic**  
1000



**In racking system**  
400

## Characteristics

Colour: black  
Runners: 5, unwelded  
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
Manufactured from regranulated material of one single type

## Options

Transponder  
Reinforcement profiles  
Rim options  
Antislip

## Loading quantities (pcs/approx.)



### Container

Container 20': **140**  
Container 40': **330**

Container 40' High Cube: **365**  
Conventional trailer 45' high cube container: **416**




### Truck

MEGA-Trailer: **494**

Jumbo: **532-570**

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



<sup>\*1</sup> All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

<sup>\*2</sup> Our service team is pleased to be at your disposal if you require exact information about material compositions.

<sup>\*3</sup> **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

**Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

**In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.