




H3 ECO

1200 x 1000 mm

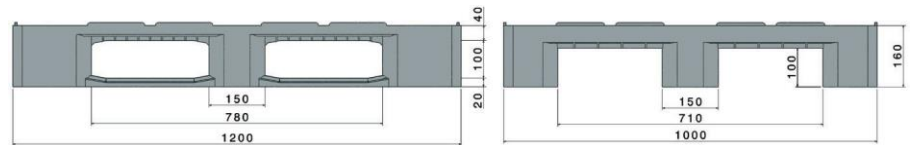

Art. no. 83182211

Technical data ^{*1}

Dimensions L x W x H (mm)	1200 x 1000 x 160		
Weight (kg)	19.5		
Material ^{*2}	HDPE, Regranulated material		
Load capacity (kg) ^{*3}	 Static 5000	 Dynamic 1250	 In racking system 850



Characteristics

Colour: black
 Runners: 3, unwelded
 Rims: 7 mm
 Temperature stability: -30 °C to +40 °C, briefly up to +90 °C
 Manufactured from regranulated material of one single type

Options


Rim options
 Palgrip® anti-slip runners

Loading quantities (pcs/approx.)

	Container	Container 20': 141 Container 40': 300	Container 40' High Cube: 340 Conventional trailer 45' high cube container: 390
	 Truck	MEGA-Trailer: 468	Jumbo: 504-540

Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

^{*2} Our service team is pleased to be at your disposal if you require exact information about material compositions.

^{*3} Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.