






## Lid for SB<sub>3</sub> & HB<sub>3</sub>

1200 X 1000 mm

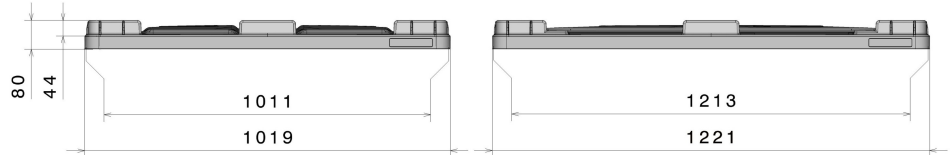

Art.-Nr.: 80410800 - 1200x1000, lightgrey

Technical data	
External Dimensions L x W x H (mm)	1221 x 1019 x 80
Weight (kg)	7.7
Volume (l)	l
Material	PE
Nesting Height (mm)	44
Load capacity (kg)	<div style="display: inline-block; text-align: center;">  <b>Holding Capacity</b> kg         </div> <div style="display: inline-block; text-align: center; margin-left: 20px;">  <b>Extra Load</b> -         </div>
Characteristics	Options
Colour: light grey Stackable Temperature stability: -30 °C to +40 °C, briefly up to +90 °C	-
Loading quantities (Pcs / Approximate amount)	
On request	
Labelling	
Hot stamping of letters and logos on request, depending on quantity. Position on long side.	



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 **Stacking Load:** With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 20 °C.  
**Dynamic Load:** On a forklift with an evenly distributed load at a room temperature of approx. 20 °C.